

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**


**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

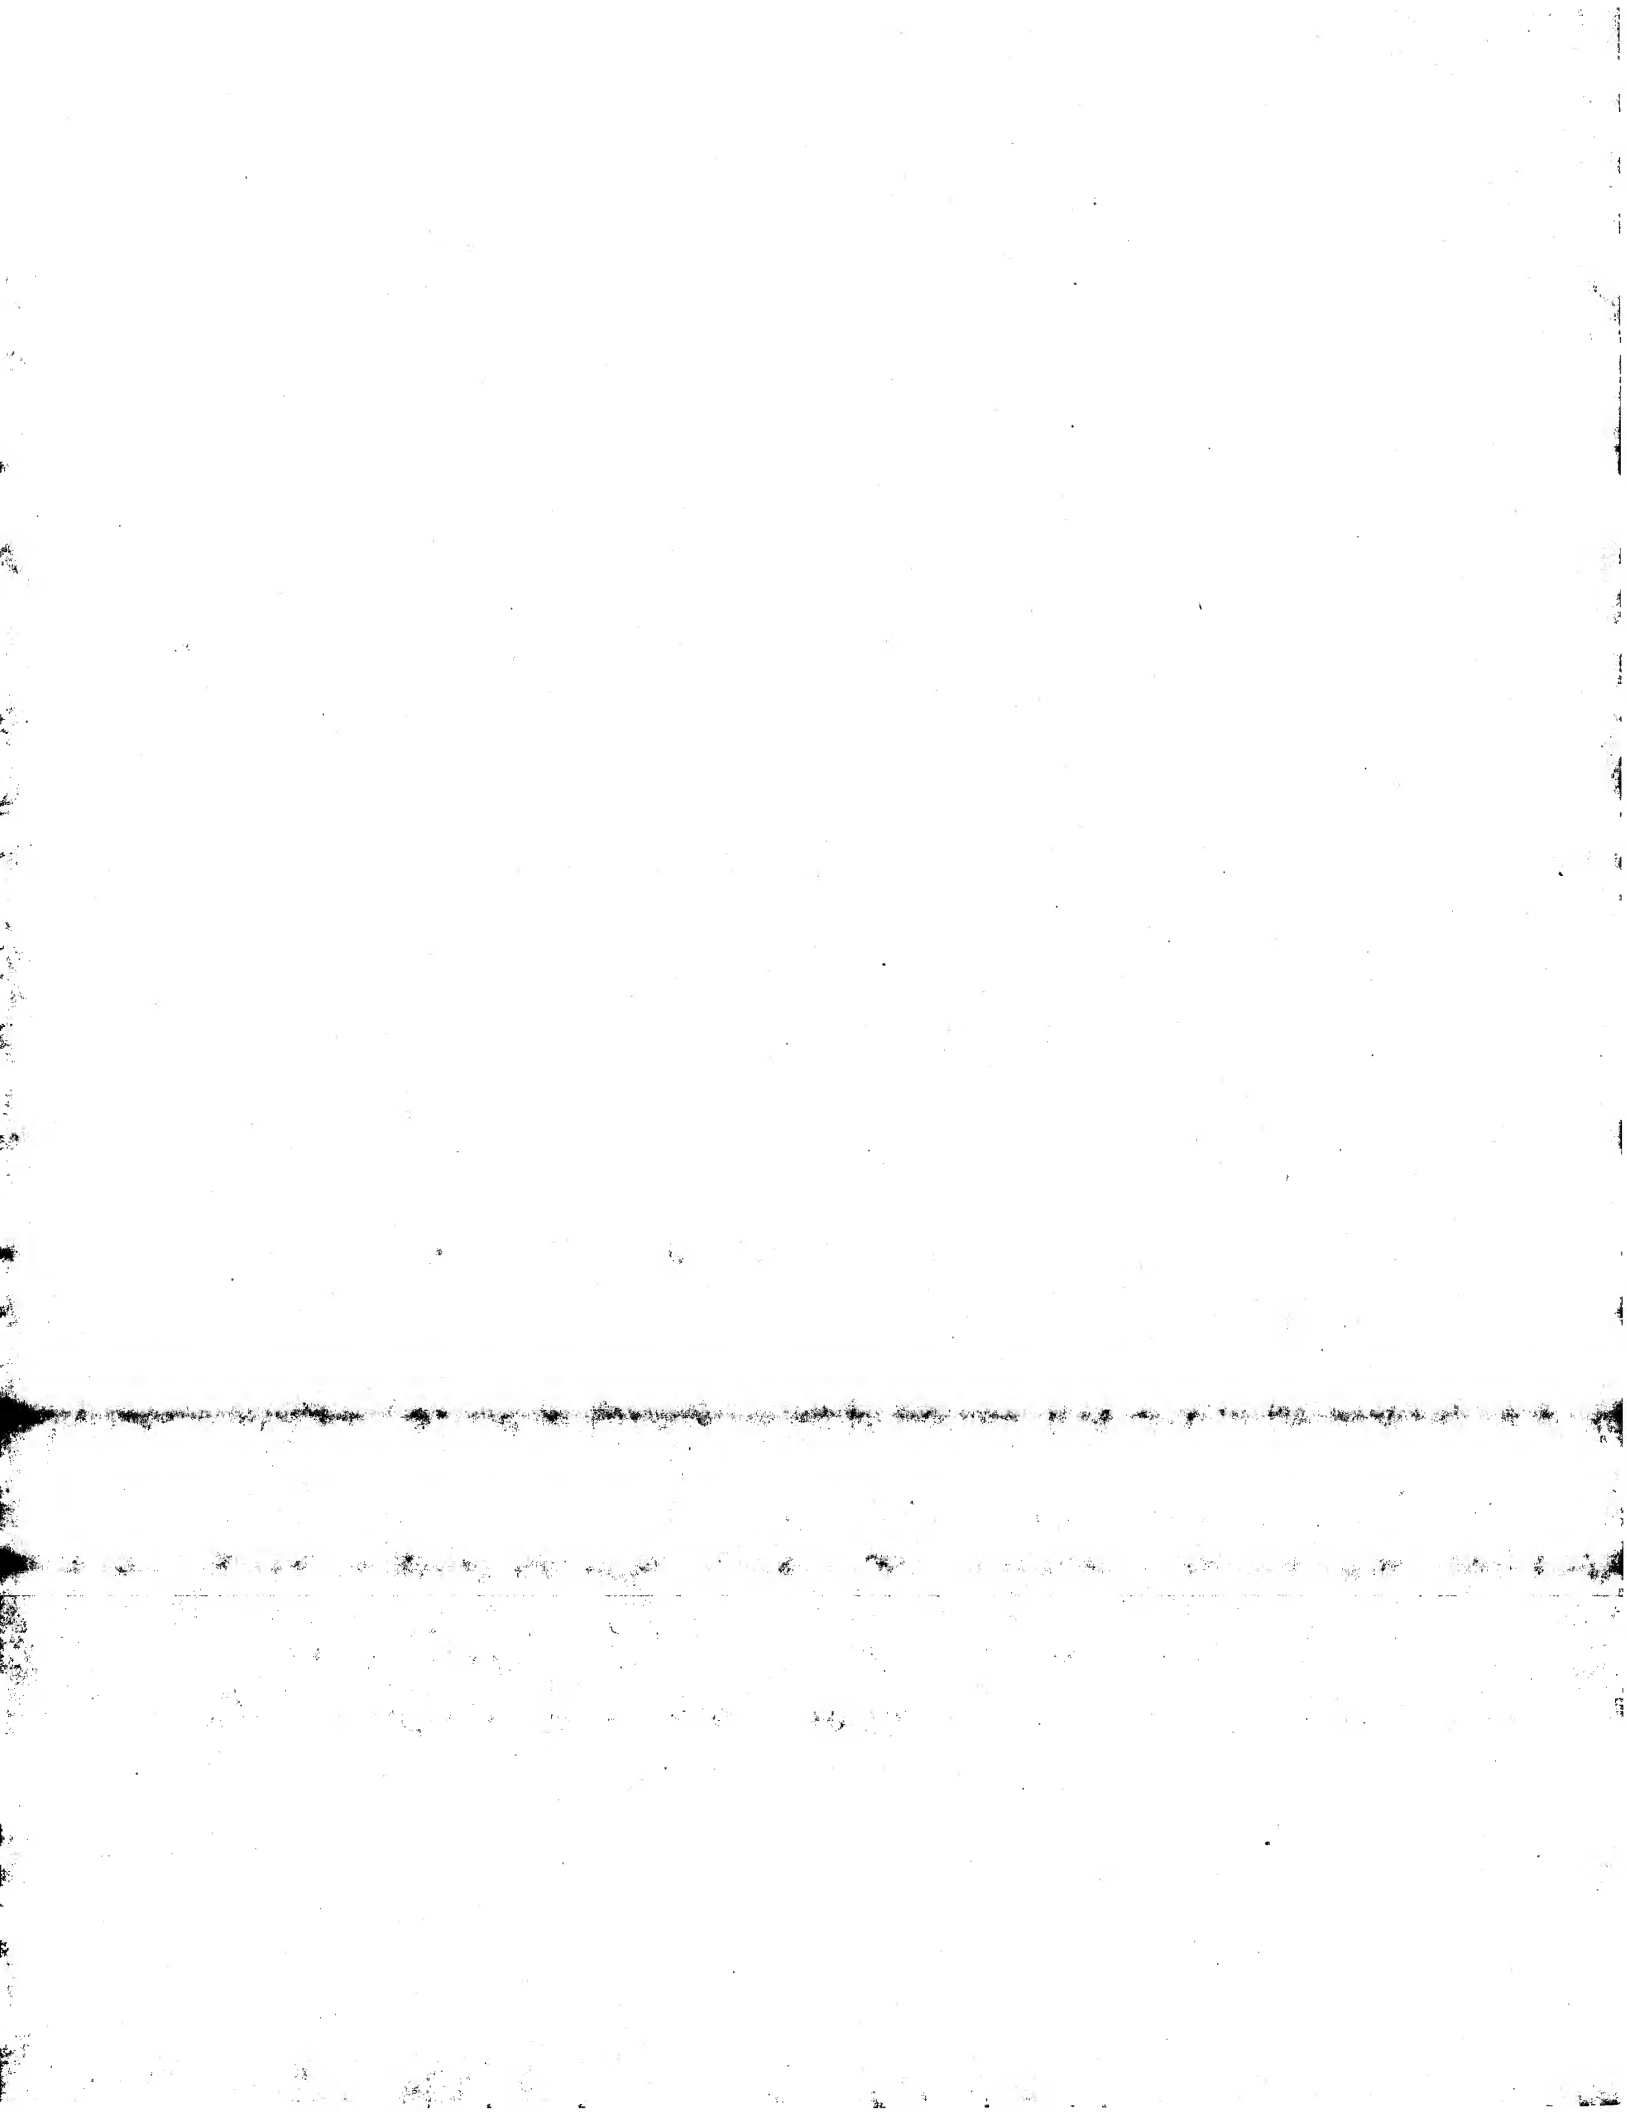

**CERTIFICATE OF MAILING**  
37 CFR 1.8

I hereby certify that this correspondence is being deposited on  
December 4, 2003 with the United States Postal Service as  
First Class Mail in an envelope addressed to: Commissioner  
for Patents, P.O. Box 1450 Alexandria, VA 22313-1450.

4 Dec 03  
Date

  
Signature



100-100000-100000

100-100000-100000



INVESTOR IN PEOPLE


The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

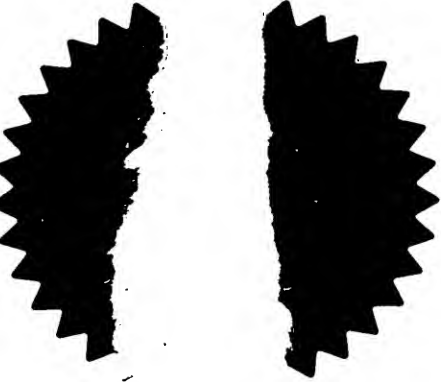

Signed

*H. Behan*

Dated 18 February 2003






1/77

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

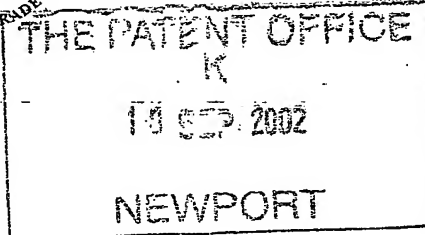

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

P12051GB\AS\RO\AM

10 SEP 2002

2. Patent application number

(The Patent Office will fill in this part)

0220933.6

10SEP02 E747036-1 D00239

P01/7700 0.00-0220933.6

3. Full name, address and postcode of the or of each applicant (underline all surnames)

WEATHERFORD/LAMB, INC.  
515 POST OAK BOULEVARD  
SUITE 600  
HOUSTON  
TX 77027  
UNITED STATES OF AMERICA

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

DELAWARE  
UNITED STATES OF AMERICA

4. Title of the invention

TUBING EXPANSION TOOL

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

CRUIKSHANK & FAIRWEATHER  
19 ROYAL EXCHANGE SQUARE  
GLASGOW  
G1 3AE  
SCOTLAND  
UNITED KINGDOM

Patents ADP number (if you know it)

547002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

23 ✓

Claim(s)

10 ✓

Abstract

Drawing(s)

9 ✓

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

1 ✓


Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature



Date

CRUIKSHANK & FAIRWEATHER

9 SEPTEMBER 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

ANDREW SHANKS

0141 221 5767

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.



DUPLICATE

1

TUBING EXPANSION TOOL

FIELD OF THE INVENTION

The present invention relates to a tubing expansion tool. In particular, but not exclusively, the present invention relates to a tubing expansion tool including an expansion member which is radially moveable.

5 BACKGROUND OF THE INVENTION

A number of different tools have been proposed for carrying out expansion of downhole tubing such as expandable bore-lining tubing. The applicant's International Patent Publication No. WO00/37766 discloses  
10 a rotary expansion tool including a number of rollers mounted on radially moveable pistons. Fluid pressure urges the pistons radially outwardly, to bring the rollers into contact with tubing to be expanded. The tool is then rotated and advanced axially through the tubing to expand  
15 the tubing to a greater internal diameter.

The rollers are compliant such that if the tool encounters a portion of tubing which cannot be expanded, the rollers can move inwardly to advance through the restriction.

20 However, although offering numerous advantages, use of a tool with compliant rollers introduces the possibility of the occurrence of irregularities in the internal diameter of the expanded tubing, which may not be appropriate. For

example, if it is desired to hang an expandable liner from borehole casing, a portion of the upper end of the liner may be expanded into contact with the casing to provide hanging support for the liner, with another portion of the liner being expanded into contact with the casing to provide a fluid seal between the liner and the casing. Thus, the liner must be expanded to a determined outer diameter; if a compliant tool has been utilised, it cannot be determined that the liner has been expanded to the appropriate diameter.

#### SUMMARY OF THE INVENTION

It is amongst the objects of embodiments of the present invention to provide tubing expansion tools which allow a predictable degree of diametric expansion of tubing in a downhole environment, which can be easily recovered from tubing during an expansion procedure, and which offer improved flexibility in their methods of activation.

According to a first aspect of the present invention, there is provided a tubing expansion tool comprising:

a body; and

at least one expansion member radially movably mounted on the body for movement towards an extended configuration describing an expansion diameter for expanding tubing to a predetermined diameter, the expansion member being lockable in the extended configuration.

According to a second aspect of the present invention,

there is provided a method of expanding tubing, the method comprising the steps of:

providing a tubing expansion tool comprising a body and at least one expansion member movably mounted on the body;

moving the expansion member radially outwardly to an extended configuration describing an expansion diameter;

locking the expansion member in the extended configuration; and

moving the expansion tool through tubing to be expanded.

Providing a tubing expansion tool with an expansion member which is lockable in an extended configuration allows the internal diameter of the tubing after expansion to be accurately predicted. The expansion member is preferably released from the extended configuration after removal of the tool from the tubing. This allows verification that the expansion member has been correctly locked during the expansion procedure, and thus that expansion to the predetermined diameter has been performed. Alternatively, the expansion member may be releasably lockable in the extended configuration, and may therefore be unlocked whilst located in the tubing. This allows retraction of the expansion member prior to retrieval of the tool to surface.

Preferably, the tool further comprises a locking

assembly for locking the expansion member in the extended configuration.

Preferably also, the tool further comprises an activating member for moving the expansion member towards the extended configuration. The activating member may be moveable between a deactivating position and an activating position, in the activating position the activating member maintaining the expansion member in the extended configuration.

Preferably, the activating member is lockable in the activating position, to lock the expansion member in the extended configuration. The activating member may be adapted to be locked in the activating position by the locking assembly.

The locking assembly may include a locking member adapted to engage the activating member when the activating member is in the activating position, to restrain the activating member and thus maintain the expansion member in the extended configuration.

Alternatively, the locking assembly may include a locking member coupled to the activating member and adapted to engage the body or another part of the tool when the activating member is in the activating position, to restrain the activating member against movement with respect to the body.

In a further alternative, the expansion member may be

directly lockable in the extended configuration. The locking assembly may therefore comprise a locking member adapted to engage the expansion member when the expansion member is in the extended configuration, or the expansion member may be coupled to the expansion member and may be adapted to engage the body or another part of the tool. Thus, following movement of the expansion member to the extended configuration, the expansion member may be locked against further movement.

10 In further embodiments, the expansion member may be hydraulically locked in the extended configuration.

The locking assembly may comprise a mechanical, electro-mechanical or hydraulic locking assembly, or a combination thereof. The lock member may be mounted in the tool body, in the activating member, or in an intermediate member between the tool body and the activating member. The locking assembly may comprise a lock member in the form of a snap or lock ring, a latch, lock pin, locking dogs or keys and may be mechanically, electro-mechanically and/or hydraulically actuated.

20 According to a third aspect of the present invention, there is provided a tubing expansion tool comprising:

a body; and

at least one expansion member radially movably mounted on the body for movement between a retracted configuration and an extended configuration describing an expansion

diameter for expanding tubing, the expansion member being  
biased radially inwardly.

According to a fourth aspect of the present invention,  
there is provided a method of expanding tubing, the method  
5 comprising the steps of:

providing a tubing expansion tool comprising a body  
and at least one expansion member movably mounted on the  
body; and

moving the expansion member radially outwardly to an  
10 extended configuration describing an expansion diameter  
against a biasing force which biases the expansion member  
radially inwardly.

The expansion member is biased towards the retracted  
configuration to facilitate removal of the tool from tubing  
15 in the event that the tool becomes stuck. For example, to  
expand tubing from the bottom-up, the tool would be located  
at the bottom of the tubing and activated to move the  
expansion member to the extended configuration. The tool  
would then be drawn upwardly to diametrically expand the  
20 tubing. During bottom-up expansion, the tool may encounter  
tubing regions which cannot be expanded to the desired  
diameter. By inwardly biasing the expansion member, the  
expansion member may be retracted to allow the tool to be  
advanced through the problematic region.

25 Preferably, the tool further comprises a biasing  
assembly for biasing the expansion member radially

inwardly.

The tool may further comprise an activating member for moving the expansion member towards the extended configuration. The activating member may be moveable  
5 between a deactivating position and an activating position, in the activating position the activating member maintaining the expansion member in the extended configuration. When the activating member is in the deactivating position, this de-supports the expansion  
10 member and allows the expansion member to be retracted from the extended position. Preferably, the biasing assembly biases the activating member towards the deactivating position.

Alternatively, the biasing assembly may directly bias  
15 the expansion member radially inwardly. Thus when the activating member is moved to the deactivating position, the expansion member may be retracted from the extended configuration by the biasing assembly.

The biasing assembly may comprise a mechanically,  
20 electro-mechanically, hydraulically or pneumatically actuated biasing member, or a combination thereof. For example, the biasing assembly may include a biasing member in the form of a spring or a sprung member, a solenoid, a piston or any other suitable member for  
25 biasing the expansion member. It will be apparent to the skilled person that any suitable alternative biasing

member may be employed.

According to a fifth aspect of the present invention, there is provided a tubing expansion tool comprising:

a body;

5 at least one expansion member radially movably mounted on the body for movement towards an extended configuration describing an expansion diameter for expanding tubing, the expansion member being moveable in response to both:

i) an applied mechanical force; and

10 ii) an applied fluid pressure force.

According to a sixth aspect of the present invention, there is provided a method of expanding tubing, the method comprising the steps of:

15 providing a tubing expansion tool comprising a body and at least one expansion member radially movably mounted on the body for movement towards an extended configuration describing an expansion diameter;

moving the expansion member to the extended configuration in response to a selected one or both of an  
20 applied mechanical force and an applied fluid pressure force; and

moving the expansion tool through the tubing to diametrically expand the tubing.

25 This provides a tubing expansion tool which may be activated either by application of a mechanical force, by application of a fluid pressure force or by a combination



of the two.

The expansion member may be moveable by an activating assembly including an activating member for moving the expansion member towards the extended configuration. The activating member may be moveable between a deactivating position and an activating position, in the activating position, the activating member maintaining the expansion member in the extended configuration. The activating member may be moveable in response to an applied mechanical force or an applied fluid pressure force, or the assembly may include an activating member moveable in response to either an applied mechanical force, an applied fluid pressure force, or a combination of the two. In a further alternative, the activating assembly may include a first activating member moveable in response to an applied mechanical force and a second activating member moveable in response to a fluid pressure force. The first and second activating members may be associated with separate expansion members; thus there may be at least one expansion member moveable to the extended configuration in response to an applied mechanical force, and at least one separate expansion member moveable in response to an applied fluid pressure force.

The mechanical force may be generated by applying weight to the activating member or by otherwise moving the member relative to the body. The fluid pressure force may

be generated by circulating fluid through the tool or by supplying hydraulic fluid to the tool, for example via control line. The activating member may comprise a mandrel, a sleeve, pin, rod or other suitable member, or a piston or other fluid activated member. It will be apparent to persons skilled in the art that any suitable alternative activating member may be employed.

Preferably, the expansion member is pivotable relative to the body. The expansion member may be pivotably mounted on the body. The expansion member may therefore be pivotable about the body to move radially towards the extended configuration. Pivotably mounting the expansion member relative to the body allows relatively high expansion ratios of the tubing to be generated, as relatively large radial movement of the expansion member is achievable.

The expansion member may be coupled to an arm or housing pivotably mounted relative to the body, and may comprise a roller, ball or any other suitable member mounted for rotation with respect to the arm. In particular, the expansion member may comprise a generally truncated cone or conical member, rotatably mounted on a spigot defined by the arm.

The expansion member may be mounted for rotation about an axis disposed substantially parallel to a main axis of the body. The roller axis may be inclined to the main axis

of the body. Alternatively, the roller may be rotatable about an axis disposed substantially perpendicular to a main axis of the body. Preferably, the tool comprises a plurality of expansion members.

5           The activating member and/or the expansion member may include a cam surface for urging the expansion member to the expanded configuration. The cam surface may be inclined such that as the activating member is moved to the activating position, the activating member abuts the  
10           expansion member and moves the expansion member radially outwardly to the extended configuration. When the activating member is returned to the deactivating position, the expansion member is de-supported, allowing retraction of the expansion member.

15           Preferably, in use, the expansion member describes an unexpanded diameter less than an unexpanded inner diameter of the tubing. The body may also be of an outer diameter less than the unexpanded inner diameter of the tubing. This allows the tool to be run into and through tubing to  
20           be expanded to a desired location, before the tool is activated to expand the tubing. Alternatively, in use, the expansion member may describe an unexpanded diameter greater than or equal to the unexpanded inner diameter of the tubing, and the body may also be of an outer diameter  
25           greater than said diameter of the tubing.

          According to a seventh aspect of the present

invention, there is provided a tubing expansion tool comprising:

a body; and

at least one expansion member pivotably mounted with respect to the body for movement towards an extended configuration describing an expansion diameter for expanding tubing to a predetermined diameter.

#### BRIEF DESCRIPTION OF DRAWINGS

There follows a description of embodiments of the present invention, by way of example only, with reference to the accompanying drawings, in which:

Fig. 1 is a longitudinal sectional view of a tubing expansion tool in accordance with an embodiment of the present invention, shown in a deactivated configuration and located in tubing to be expanded;

Fig. 2 is a view of the tubing expansion tool of Fig. 1, drawn to a larger scale and shown in an expanded configuration during expansion of the tubing;

Fig. 3 is a view of the tubing expansion tool of Fig. 1, shown in the deactivated configuration in alternative tubing to be expanded;

Fig. 4 is a view of the tubing expansion tool of Fig. 3 in the expanded configuration, drawn to a larger scale and shown during expansion of the tubing;

Fig. 5 is a longitudinal sectional view of a tubing expansion tool in accordance with an alternative embodiment

of the present invention, shown in a de-activated configuration;

Fig. 6 is a view of the tubing expansion tool of Fig. 5, drawn to a larger scale and shown in an expanded configuration;

Fig. 7 is a longitudinal sectional view of a tubing expansion tool in accordance with a further alternative embodiment of the present invention, shown in a de-activated configuration;

Fig. 8 is a schematic, bottom view of the tubing expansion tool of Fig. 7 showing expansion members of the tool in both the de-activated and the expanded configurations; and

Fig. 9 is a view of the tubing expansion tool of Fig. 7, drawn to a larger scale and shown in an expanded configuration.

#### DETAILED DESCRIPTION OF DRAWINGS

Turning firstly to Fig. 1, there is shown a longitudinal sectional view of a tubing expansion tool in accordance with an embodiment of the present invention, indicated generally by reference numeral 10. The tool 10 is shown located in liner 12 which is to be diametrically expanded. The expansion tool 10 is shown in Fig. 1 in a de-activated configuration which allows the tool to be run through the unexpanded liner 12 to the desired location.

The expansion tool 10 comprises a hollow body 14 and

four expansion members 16, each radially moveably mounted on the body 14, for movement towards an extended configuration describing an expansion diameter, as shown in Fig. 2. Each expansion member 16 includes an oval section expansion roller 18 mounted on a piston 20, which is radially moveable in slots 22 in a tapered lower end 24 of the body 14. Alternatively, the roller 18 is mounted in a body or housing pivotably mounted to the tool body 14, for example, by a pivot such as the pivot 25 shown in the drawings.

A hollow activating mandrel 26 is mounted in the body 14 for urging the rollers 18 to the extended configuration of Fig. 2. The mandrel 26 is moveable between a deactivating position shown in Fig 1 and an activating position shown in Fig 2, in response to either an applied mechanical force, an applied fluid pressure force or a combination of the two. A lower end 52 of the mandrel 26 is truncated cone-shaped, and defines a cam surface 54 for urging the rollers 18 to the extended configuration, as will be described below. The expansion tool 10 also includes a locking assembly 35 comprising a snap ring 27 located in a groove 29 in the mandrel 26, for locking the rollers 18 in the extended configuration of Fig 2.

An upper end 28 of the mandrel 26 is coupled to a connecting sub 30 which allows a mechanical force to be exerted on the mandrel 26 to move the mandrel between the

deactivating and activating positions. The connecting sub 30 is in-turn coupled to a tubing string (not shown) from which the tool 10 is suspended, and the sub 30 is axially moveable relative to the body 14. The tool 10 also includes a biasing member comprising a spring 36, which biases the mandrel 26 towards the deactivating position of Fig 1. In the deactivating position, the mandrel 26 de-supports the rollers 18, allowing the rollers to be moved radially inwardly, towards the retracted position of Fig.

10 1.

The biasing spring 36 is located between a shoulder 38 in the body 14 and a shoulder 40 of the connecting sub 30. As will be described below, when the force on the mandrel 26 is removed or reduced, the spring 36 urges the sub 30 and mandrel 26 towards the deactivating position of Fig. 1, to de-support the rollers 18.

The tool body 14 includes an annular guide ring 42 which guides the mandrel 26 and a cylinder 44 is defined by an annular floating piston 46 mounted between the mandrel 26 and the body 14. The mandrel 26 includes a number of ports 48 extending through the wall of the mandrel which allow fluid communication between a central bore 50 of the tool 10 and the cylinder 44. Seals (not shown) are provided between the piston 46 and a shoulder 37 of the mandrel 26 such that the piston defines an upper piston area 29 and a smaller, lower piston area 31, and further

seals 58, 60 are provided above and below the cylinder 44. The seal 58, 60 ensure that pressure is applied to the upper piston area 29 and that there is no leakage into the chamber of spring 36, or past the piston 46. Also, a flow restriction nozzle 33 is provided at the lower end of the mandrel 26. As will be described below, both the differential piston area and the nozzle 33 allow movement of the mandrel 26 by application of fluid pressure, to urge the rollers 18 to the extended configuration. Flow ports 62 in the cone 52 allow flow of cooling fluid to the rollers 18 during expansion of the liner 12.

A method of operation of the expansion tool 10 will now be described, with reference to Figs. 1 and 2.

In a top-down expansion procedure, the tool 10 is run into a well borehole on coiled tubing and into the liner 12. When the tool 10 has been located at the top of the liner 12, fluid is circulated through the bore 50 of the tool, exiting through the nozzle 33. The nozzle 33 restricts fluid flow and increases the back-pressure of fluid in the bore 50, pressurising fluid in the cylinder 44 relative to the fluid acting on the lower piston area 31. The combination of the back-pressure of the fluid in the cylinder 44 and the differential piston area urges the piston 46 downwardly, carrying the mandrel 26 downwardly to the activating position of Fig 2. During this movement, the cam surface 54 of the mandrel cone 52 abuts the roller



pistons 20, urging the pistons radially outwardly in their slots 22, to the extended configuration of Fig 2.

At the same time, the tool 10 is rotated by an appropriate downhole motor, and the rollers 18 are progressively moved outwardly to describe an expansion diameter greater than the unexpanded internal diameter of the tubing 12. When the mandrel 26 has moved fully downwardly, the snap ring 27 locks out against the guide ring 42, to lock the mandrel 26 against return movement to the deactivating position of Fig 1. The mandrel 26 is thus locked in the activating position, and maintains the rollers 18 in the extended configuration of Fig 1.

The rotating expansion tool 10 is then translated axially through the tubing 12, and the rollers 18 diametrically expand the liner 12 to a greater internal diameter, as shown in Fig. 2. The expansion tool 10 is rotated and translated through the liner 12 to a desired depth, and the expansion tool 10 is then returned to surface. By verifying that the snap ring 27 has locked out to restrain the mandrel 26 in the activating configuration, this indicates to the operator that the rollers 18 were correctly located in the extended configuration during the expansion procedure. Accordingly, this provides an indication that the tubing 12 has been expanded to the desired, predetermined internal diameter described by the rollers 18 in the extended configuration. The snap ring 27

is then released and the mandrel 26 retracts to the deactivating position under the force of the spring 36, thus de-supporting the rollers 18. The rollers 18 can then be returned to the retracted configuration of Fig 1.

5           Turning now to Figs. 3 and 4, an alternative method of operation of the tool 10 will be described.

Fig. 3 shows the tool 10 located in borehole casing 64, in the deactivated position. The tool 10 has been run into the casing 64 on a string together with expandable bore-lining tubing in the form of an expandable liner 66. 10 An upper end of the liner 66 is shown in Fig. 3, and is located overlapping the casing 64, with a seal sleeve 68 provided on an outer surface of the liner 66, for sealing between the casing 64 and the liner 66.

15           When the liner 66 has been located in the desired position, the tool 10 is set down on the upper end of the liner 66 and weight is applied to the mandrel 26, through the connecting sub 30. This moves the mandrel 26 downwardly, forcing the rollers 18 outwardly to the 20 expanded configuration, and the snap ring 27 locks the mandrel in the activating position and thus the rollers 18 in the extended configuration. The tool 10 is then rotated and advanced axially through the liner 66, diametrically expanding the liner into contact with the casing 64 as 25 shown in Fig. 4. The tool 10 is advanced through the liner 66 to a desired depth, and then recovered to surface, as

described above. The liner 66 is thus hung from the casing 64 and sealed relative to the casing 64 by the seal sleeve 68.

Turning now to Fig. 5, there is shown a tubing expansion tool in accordance with an alternative embodiment of the present invention, the tool indicated generally by reference numeral 100. Like components of the tool 100 with the tool 10 of Fig. 1 share the same reference numerals incremented by 100. For ease of reference, only the significant differences between the structure of the tool 100 with respect to the tool 10 will be described herein.

The tool 100 includes three expansion member assemblies 116, each comprising expansion arms 70 coupled to the tool body 114 by pivots 125 and an expansion ball 72 rotatably mounted to the arm 70 for expanding tubing. The arms 70 are spaced  $120^\circ$  apart and are moveable about the pivots 125 between the de-activated configuration of Fig. 5 and the expanded configuration of Fig. 6 in the same fashion as the tool 10. The mandrel 126 includes a cylindrical lower end 124 and each arm 70 includes an inner surface 156 which is recessed (not shown) to define a cam surface which abuts the mandrel lower end 124. As the mandrel 126 descends, the mandrel urges the arms 70, and thus the expansion balls 72, outwardly to the expanded configuration of Fig. 6.

Pivotably mounting the arms 70 on the body 114 in this fashion allows a high expansion ratio of the tubing as there is a relatively large movement of the expansion balls 72 between the de-activated and expanded configurations.

5        Turning now to Fig. 7, there is shown a tubing expansion tool in accordance with a further alternative embodiment of the present invention, the tool indicated generally by reference numeral 200. This view of the tool 200 corresponds to a section along line A-A of Fig. 8. It  
10        will be understood that the view of the tool 100 shown in Fig. 5 is sectioned in a similar fashion.

      Like components of the tool 200 with the tool 10 of Fig. 1 share the same reference numbers incremented by 200. Again, only the main differences between the tool 200 and  
15        the tool 10 will be described herein.

      The tool 200 includes three expansion members 216 spaced 120° apart and including expansion arms 270 pivotably mounted to the tool body 214 by pivots 225. Tapered, truncated expansion cones 274 are rotatably mounted on  
20        spindles of the arms 270 for expanding tubing when the tool is moved to the expanded configuration of Fig. 9. Again, a high expansion ratio is achieved by the relatively large movement of the expansion members 216, as shown best in Fig. 8, the position of the cones 274 in the expanded  
25        configuration indicated by the broken reference line. The tool 200 is otherwise similar to the tool 100 of Fig. 5 and

cam surfaces 76 defined by the arms 270 are illustrated in Fig. 7. These cam surfaces 76 abut the lower end 224 of the tool mandrel 226 during downward movement of the mandrel, to urge the expansion arms 270 outwardly to the expanded configuration.

In further embodiments of the present invention, the tools 10, 100 or 200 may be activated through a combination of mechanical force applied to the respective tool mandrel and through circulation of fluid through the tool bore to force the mandrel downwardly.

In still further embodiments of the present invention, the expansion tools 10, 100 or 200 may be deployed as part of a string including a rotary expansion tool of the type disclosed in International Patent Publication No. WO00/37766. For example, one of the expansion tools 10, 100 or 200 may be disposed in a string including a rotary expansion tool of the type disclosed in WO00/37766. The expansion tool of WO00/37766 may be used to create an initial, partial expansion of the tubing 12 during movement of the string through tubing to be expanded, to hang the tubing, in the form of liner carrying a seal from a larger diameter casing. The expansion tool 10, 100 or 200 is then fully activated as described above, to expand the tubing to a determined diameter, by passing the tool down through the tubing to a desired depth. The tool is also passed through the interface between the casing and liner, to ensure the

liner and the seal are expanded to the correct predetermined diameter, thus confirming integrity of the connection. Use of a string including both such expansion tools offers flexibility of operation in the downhole environment.

Various modifications may be made to the foregoing within the scope of the present invention.

For example, the tool may only include locking means or biasing means. The tool may be mechanically activated in any alternative fashion suitable for moving the mandrel down relative to the body. For example, the tool mandrel may be urged downwardly relative to the tool body by restraining the body and setting weight down on the mandrel.

The snap ring may alternatively be disengaged downhole, such that the biasing spring returns the sub and mandrel to the de-activated position. This de-supports the rollers, which are now no longer able to exert an expansion force on the tubing, allowing the expansion tool to be returned to surface more easily. The snap ring may be released downhole by a release assembly such as release sleeve moved over the snap ring to cam the ring into the ring slot, allowing movement of the mandrel past the guide ring. Alternatively, the tool may include dogs or pins for moving the snap ring inwardly. In a further alternative, the snap ring may simply be sheared out.

The mandrel may define a piston in place of a floating annular piston mounted on a shoulder of the mandrel, the mandrel shoulder may define the piston. Thus, for example, the annular piston 46 of the tool 10 may comprise an integral part of or may be coupled to the mandrel shoulder 37.

The tool may be run on jointed tubing and may be driven from surface by a kelly or top drive.

Where the expansion members 16 of the tool 10 are mounted on pivots 25, movement of the mandrel 26 downwardly may rotate the rollers 18 about the pivot 25 such that the rollers 18 describe an expanded diameter for expanding tubing, in a similar fashion to the tools 100 and 200 of Figs. 5 to 9.

Where the tools are activated by fluid pressure, the respective tool mandrel may be urged downwardly either by providing the mandrel with a restriction nozzle to create a back pressure, or by defining a differential piston area across the floating annular piston, or by a combination of the two, as described above.

## WE CLAIM:

1. A tubing expansion tool comprising:

a body; and

5 at least one expansion member radially movably mounted on the body for movement towards an extended configuration describing an expansion diameter for expanding tubing to a predetermined diameter, the expansion member being lockable in the extended configuration.

10

2. A tool as claimed in claim 1, wherein the expansion member is mechanically lockable in the extended configuration.

15

3. A tool as claimed in claim 1, wherein the expansion member is hydraulically lockable in the extended configuration.

20

4. A tool as claimed in claim 1, wherein the expansion member is electro-mechanically lockable in the extended configuration.

25

5. A tool as claimed in any preceding claim, further comprising a locking assembly for locking the expansion member in the extended configuration.



6. A tool as claimed in any preceding claim, further comprising an activating member for moving the expansion member towards the extended configuration.

5 7. A tool as claimed in claim 6, wherein the activating member is moveable between a deactivating position and an activating position, in the activating position the activating member maintaining the expansion member in the extended configuration.

10

8. A tool as claimed in claim 7, wherein the activating member is lockable in the activating position, to lock the expansion member in the extended configuration.

15

9. A tool as claimed in claim 8, further comprising a locking assembly including a locking member adapted to engage the activating member when the activating member is in the activating position, to restrain the activating member.

20

10. A tool as claimed in claim 8, further comprising a locking assembly including a locking member coupled to the activating member and adapted to engage the tool body when the activating member is in the activating position, to  
25 restrain the activating member.

11. A tool as claimed in claim any one of claims 1 to 7,  
wherein the expansion member is directly lockable in the  
extended configuration.

5 12. A tool as claimed in claim 11, further comprising a  
locking assembly including a locking member adapted to  
engage the expansion member when the expansion member is in  
the extended configuration.

10 13. A tool as claimed in claim 11, further comprising a  
locking assembly including a locking member coupled to the  
expansion member and adapted to engage the tool body.

14. A tubing expansion tool comprising:

15 a body; and

at least one expansion member radially movably mounted  
on the body for movement between a retracted configuration  
and an extended configuration describing an expansion  
diameter for expanding tubing, the expansion member being  
20 biased radially inwardly.

15. A tool as claimed in claim 14, further comprising a  
biasing assembly for biasing the expansion member  
radially inwardly.

25

16. A tool as claimed in claim 15, wherein the biasing

assembly comprises a mechanical biasing member.

17. A tool as claimed in claim 16, wherein the biasing assembly includes a biasing spring.

5

18. A tool as claimed in claim 15, wherein the biasing assembly comprises an electro-mechanical assembly.

10

19. A tool as claimed in claim 15, wherein the biasing assembly comprises a hydraulic assembly.

20. A tool as claimed in any one of claims 14 to 19, further comprising an activating member for moving the expansion member towards the extended configuration.

15

21. A tool as claimed in claim 20, wherein the activating member is moveable between a deactivating position and an activating position, in the activating position the activating member maintaining the expansion member in the extended configuration.

20

22. A tool as claimed in either of claims 20 or 21, wherein the activating member is biased towards the deactivating position.

25

23. A tool as claimed in any one of claims 15 to 19,

wherein the biasing assembly directly biases the  
expansion member radially inwardly.

24. A tubing expansion tool comprising:

5 a body;

at least one expansion member radially movably mounted  
on the body for movement towards an extended configuration  
describing an expansion diameter for expanding tubing, the  
expansion member being moveable in response to both:

- 10 i) an applied mechanical force; and  
ii) an applied fluid pressure force.

25. A tool as claimed in claim 24, wherein the expansion  
member is moveable by an activating assembly including an  
15 activating member for moving the expansion member towards  
the extended configuration.

26. A tool as claimed in claim 25, wherein the activating  
member is moveable between a deactivating position and an  
20 activating position, in the activating position, the  
activating member maintaining the expansion member in the  
extended configuration.

27. A tool as claimed in either of claims 25 or 26,  
25 wherein the activating member is moveable in response to  
either an applied mechanical force, an applied fluid

pressure force, or a combination of the two.

28. A tool as claimed in either of claims 25 or 26,  
wherein the activating assembly includes a first activating  
5 member moveable in response to an applied mechanical force  
and a second activating member moveable in response to a  
fluid pressure force.

29. A tool as claimed in claim 28, wherein the first and  
10 second activating members are associated with separate  
expansion members.

30. A tool as claimed in any one of claims 25 to 29,  
wherein the activating member comprises a mandrel.

15 31. A tool as claimed in any one of claims 25 to 29,  
wherein the activating member comprises a piston.

20 32. A tool as claimed in any one of claims 6 to 10, 20 to  
23, or 25 to 31, wherein the activating member includes a  
cam surface for urging the expansion member to the expanded  
configuration.

25 33. A tool as claimed in any preceding claim, wherein, in  
use, the expansion member describes an unexpanded diameter  
less than an unexpanded inner diameter of the tubing.

34. A tool as claimed in any one of claims 1 to 32, wherein, in use, the expansion member describes an unexpanded diameter greater than the unexpanded inner diameter of the tubing.

5

35. A tool as claimed in any preceding, wherein the expansion member is pivotable relative to the body.

10

36. A tool as claimed in claim 35, wherein the expansion member is pivotably mounted to the body.

15

37. A tool as claimed in claim 36, further comprising an arm pivotably mounted to the body, the expansion member mounted for rotation with respect to the arm.

20

38. A tubing expansion tool comprising:

a body; and

at least one expansion member pivotably mounted with respect to the body for movement towards an extended configuration describing an expansion diameter for expanding tubing to a predetermined diameter.

25

39. A method of expanding tubing, the method comprising the steps of:

providing a tubing expansion tool comprising a body and at least one expansion member movably mounted on the

body;

---

moving the expansion member radially outwardly to an extended configuration describing an expansion diameter;

locking the expansion member in the extended  
5 configuration; and

moving the expansion tool through tubing to be expanded.

40. A method as claimed in claim 39, wherein the expansion  
10 member is released from the extended configuration after removal of the tool from the tubing.

41. A method as claimed in claim 39, wherein the expansion  
15 member is released from the extended configuration whilst the tool is in the tubing.

42. A method of expanding tubing, the method comprising the steps of:

providing a tubing expansion tool comprising a body  
20 and at least one expansion member movably mounted on the body; and

moving the expansion member radially outwardly to an extended configuration describing an expansion diameter against a biasing force which biases the expansion member  
25 radially inwardly.

43. A method as claimed in claim 42, wherein the biasing force acts directly on the expansion member to urge the expansion member radially inwardly.

5 44. A method as claimed in claim 42, wherein the expansion member is moved to the extended configuration by moving an activating member from a deactivating to an activating position, and wherein the biasing force urges the activating member towards the deactivating position.

10 45. A method of expanding tubing, the method comprising the steps of:

providing a tubing expansion tool comprising a body and at least one expansion member radially movably mounted on the body for movement towards an extended configuration describing an expansion diameter;

15 moving the expansion member to the extended configuration in response to a selected one or both of an applied mechanical force and an applied fluid pressure force; and

20 moving the expansion tool through the tubing to diametrically expand the tubing.

46. A method as claimed in claim 45, further comprising applying a mechanical force by applying weight to the tool.

25



47. A method as claimed in claim 45, further comprising applying a fluid pressure force by circulating fluid through the tool.

5 48. A method as claimed in claim 45, further comprising applying a fluid pressure force by supplying hydraulic fluid to the tool.



1/9


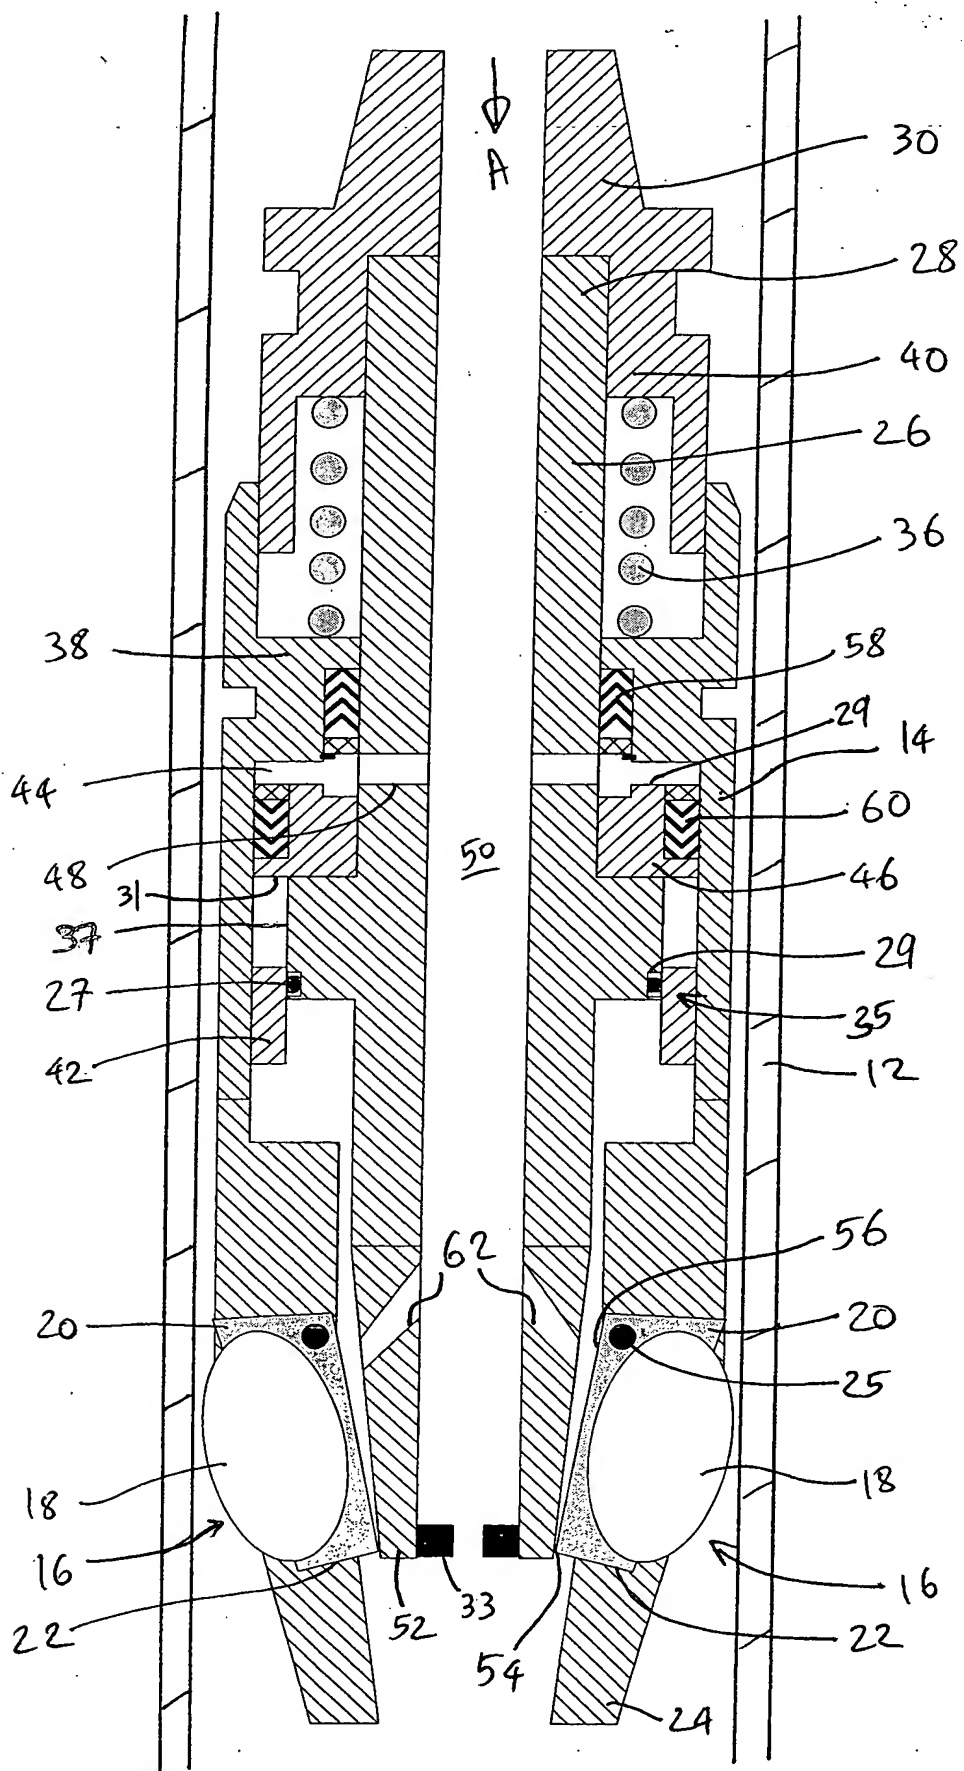


FIG 1



2/9

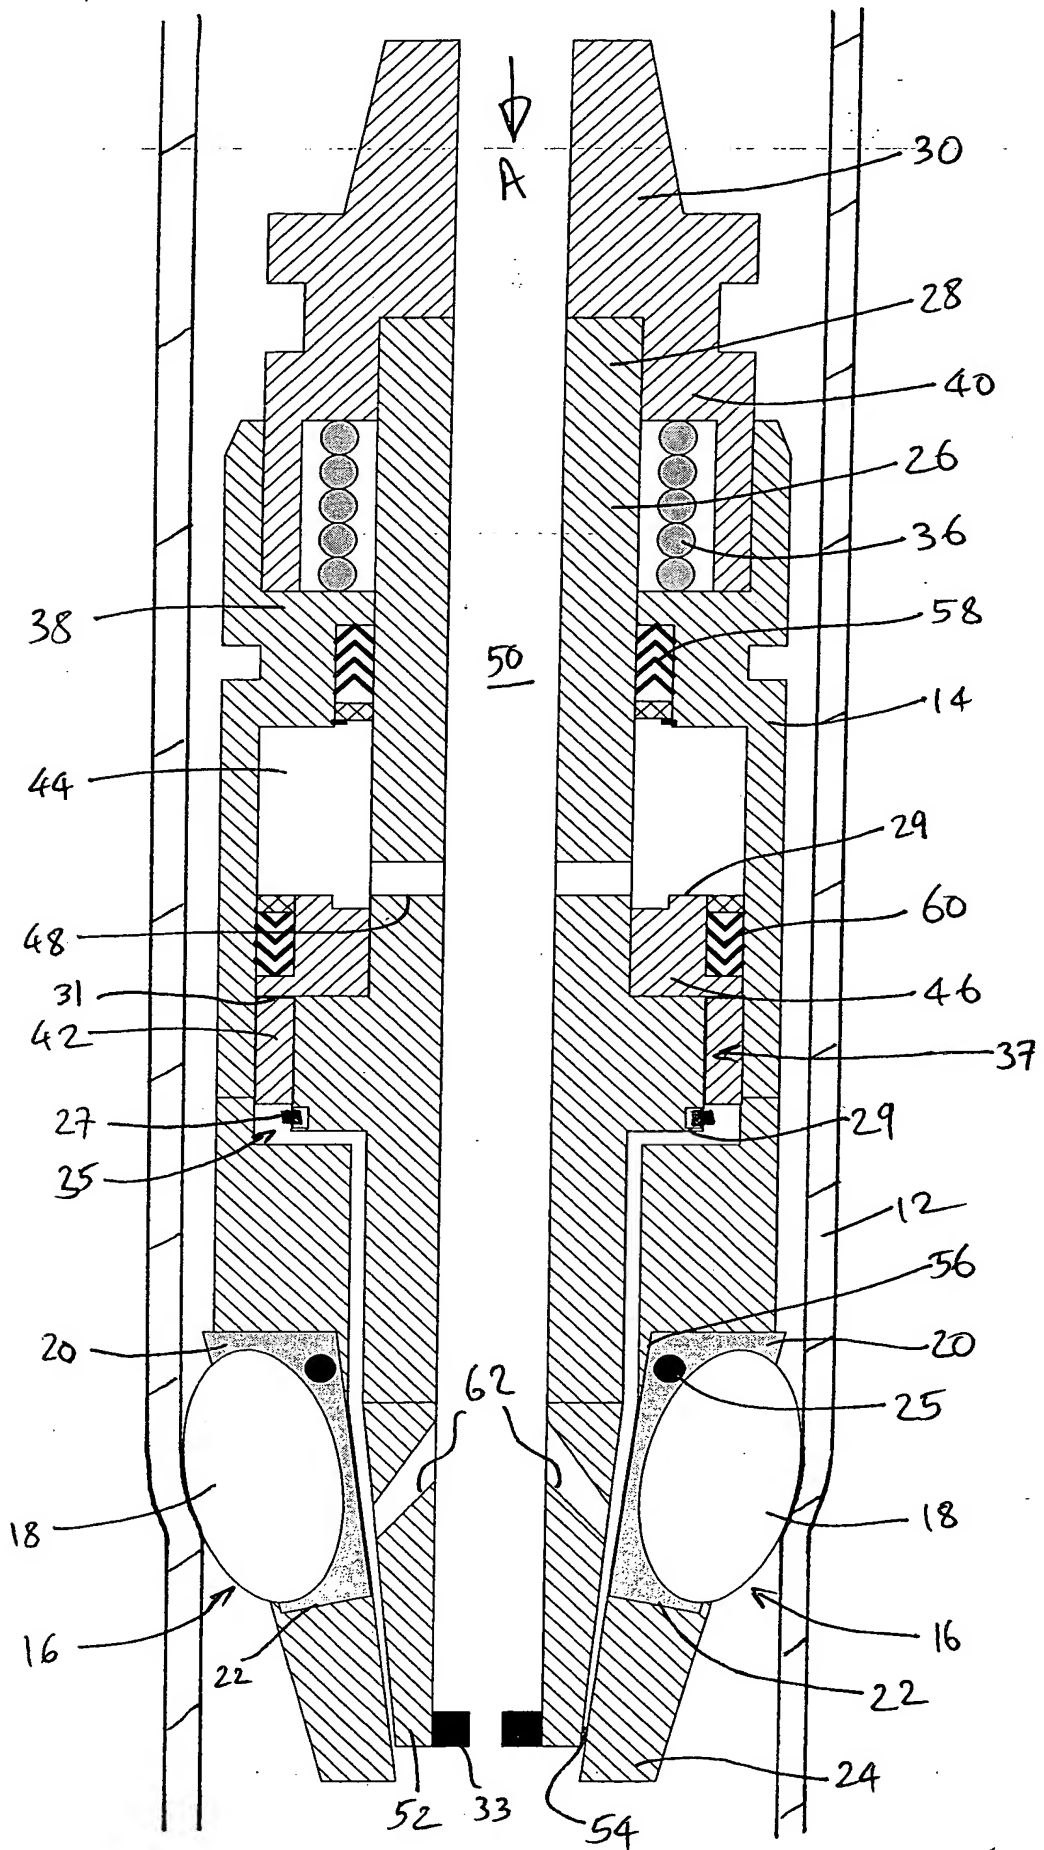


10

FIG 2



3/9

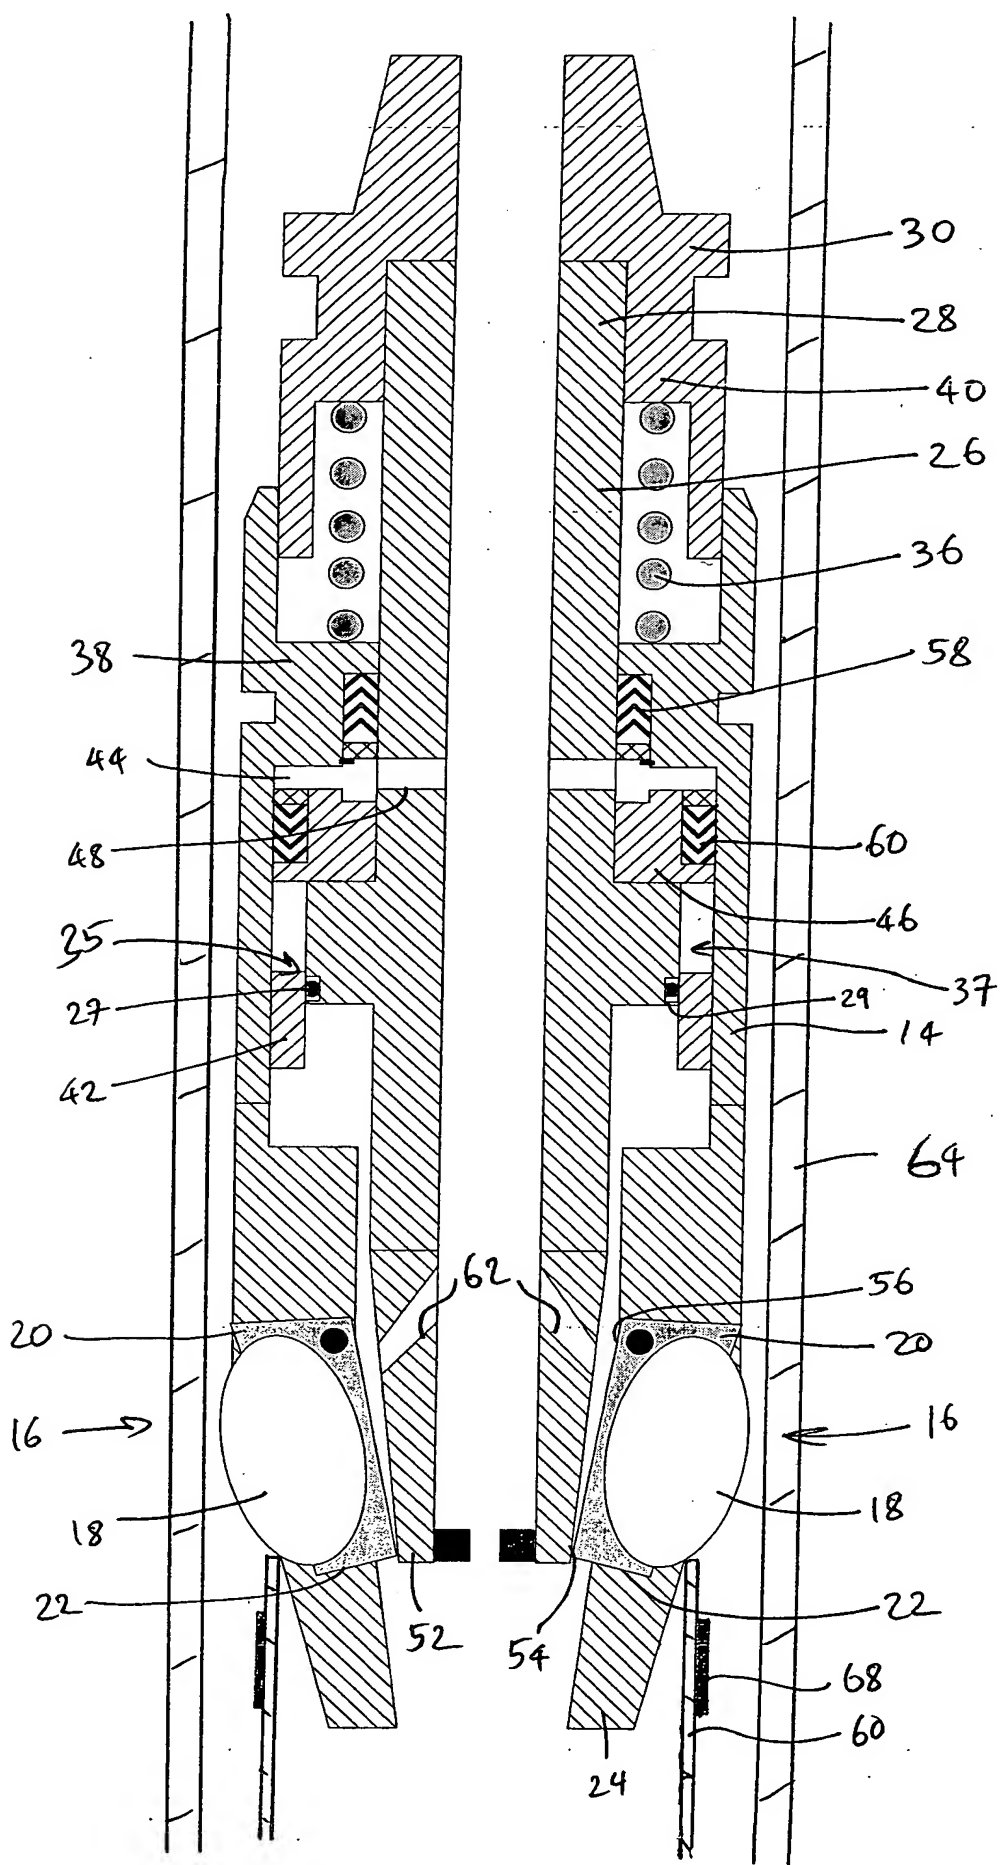


10  
↓

FIG 3





4/9

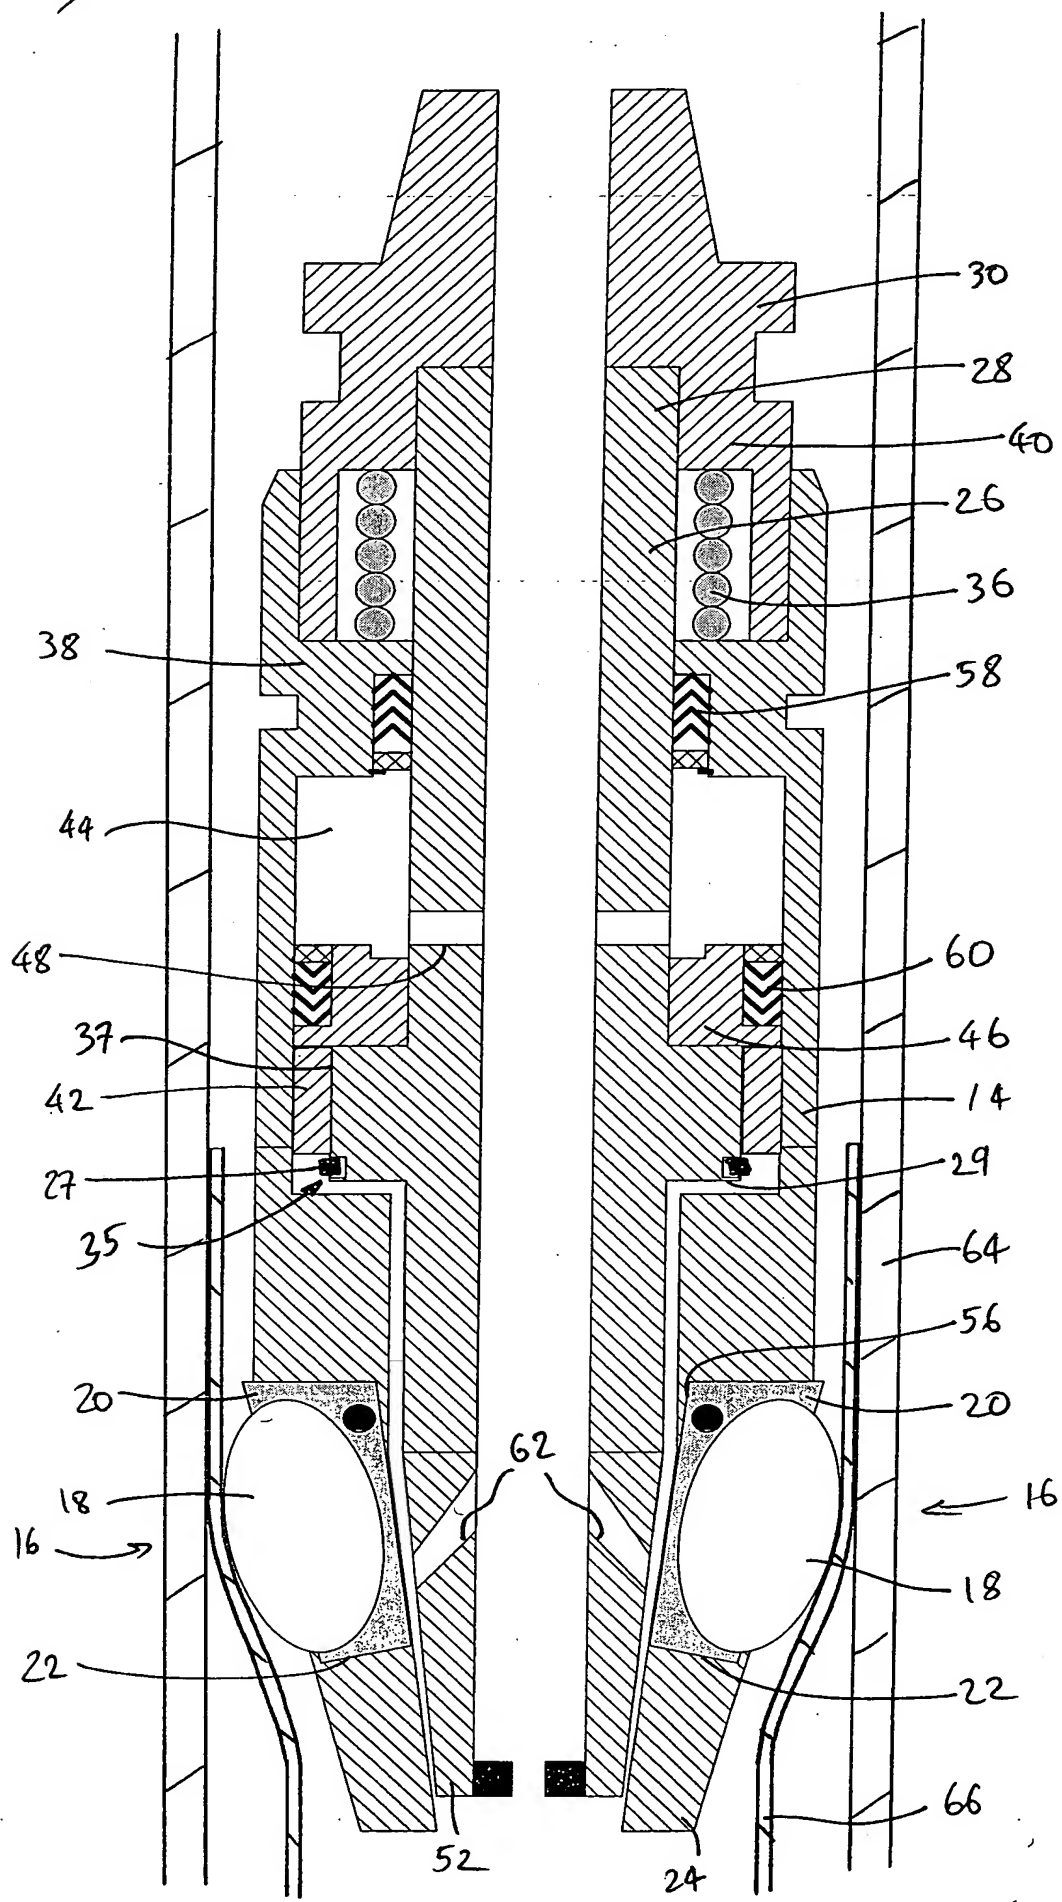


10  
↓

FIG 4




5/9

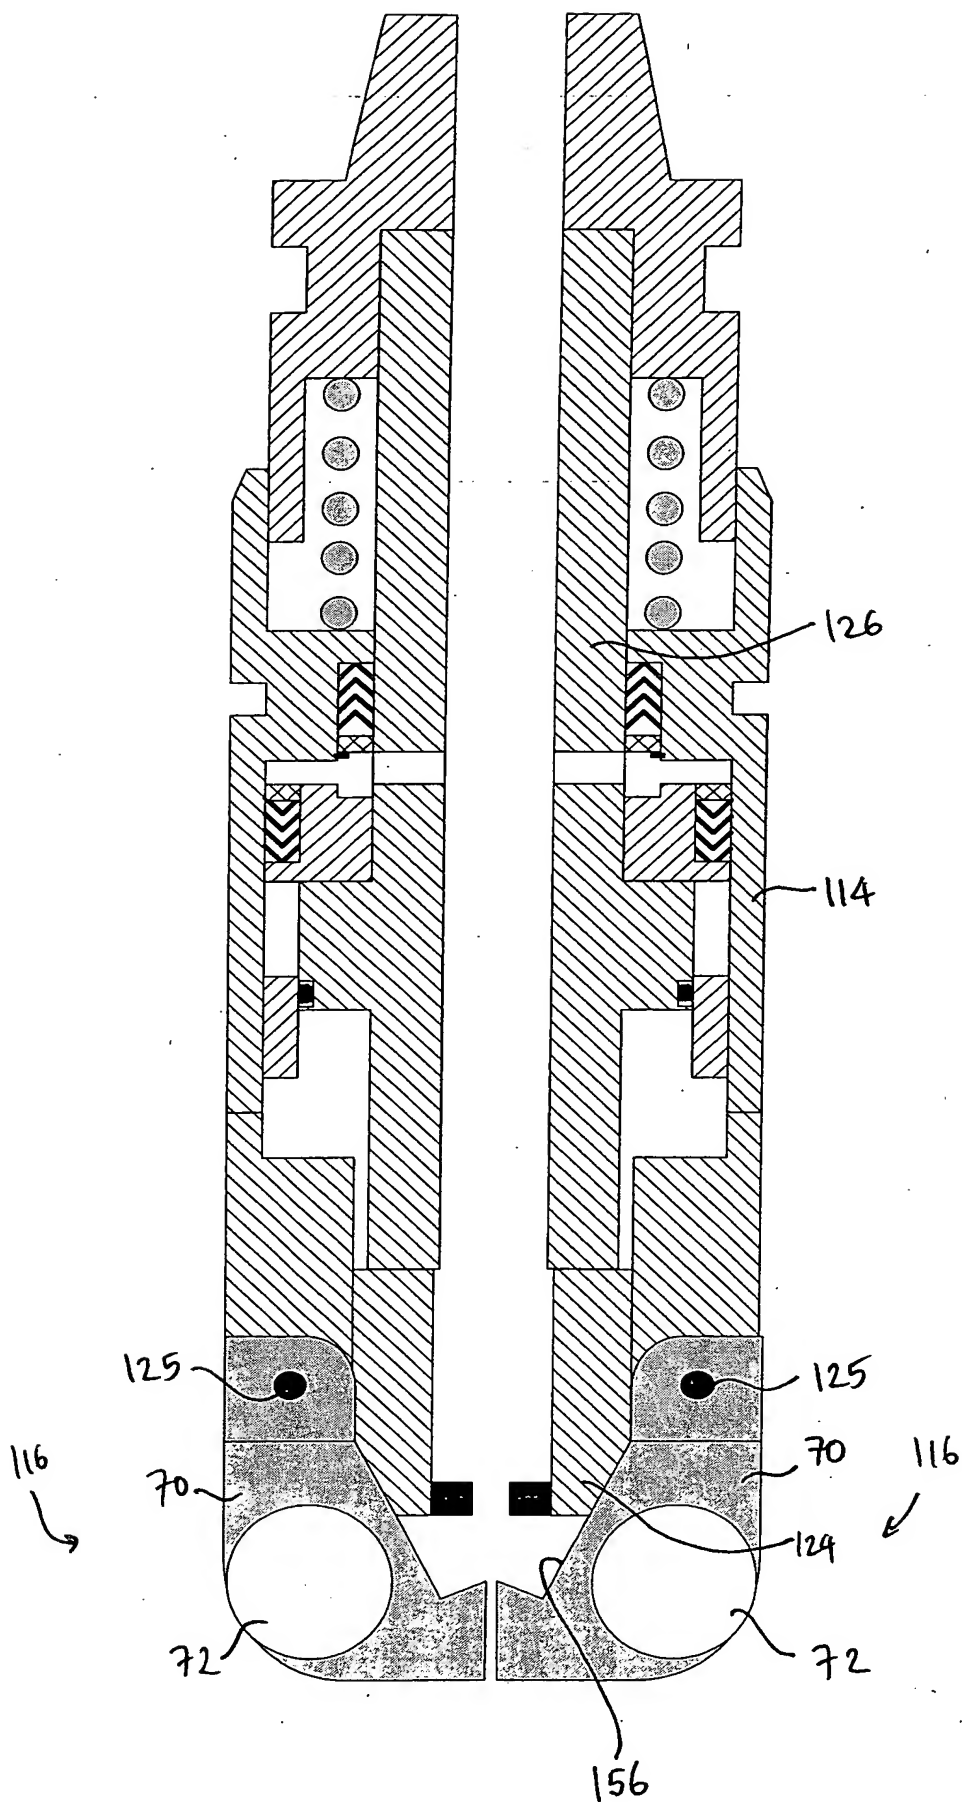


100

FIG 5



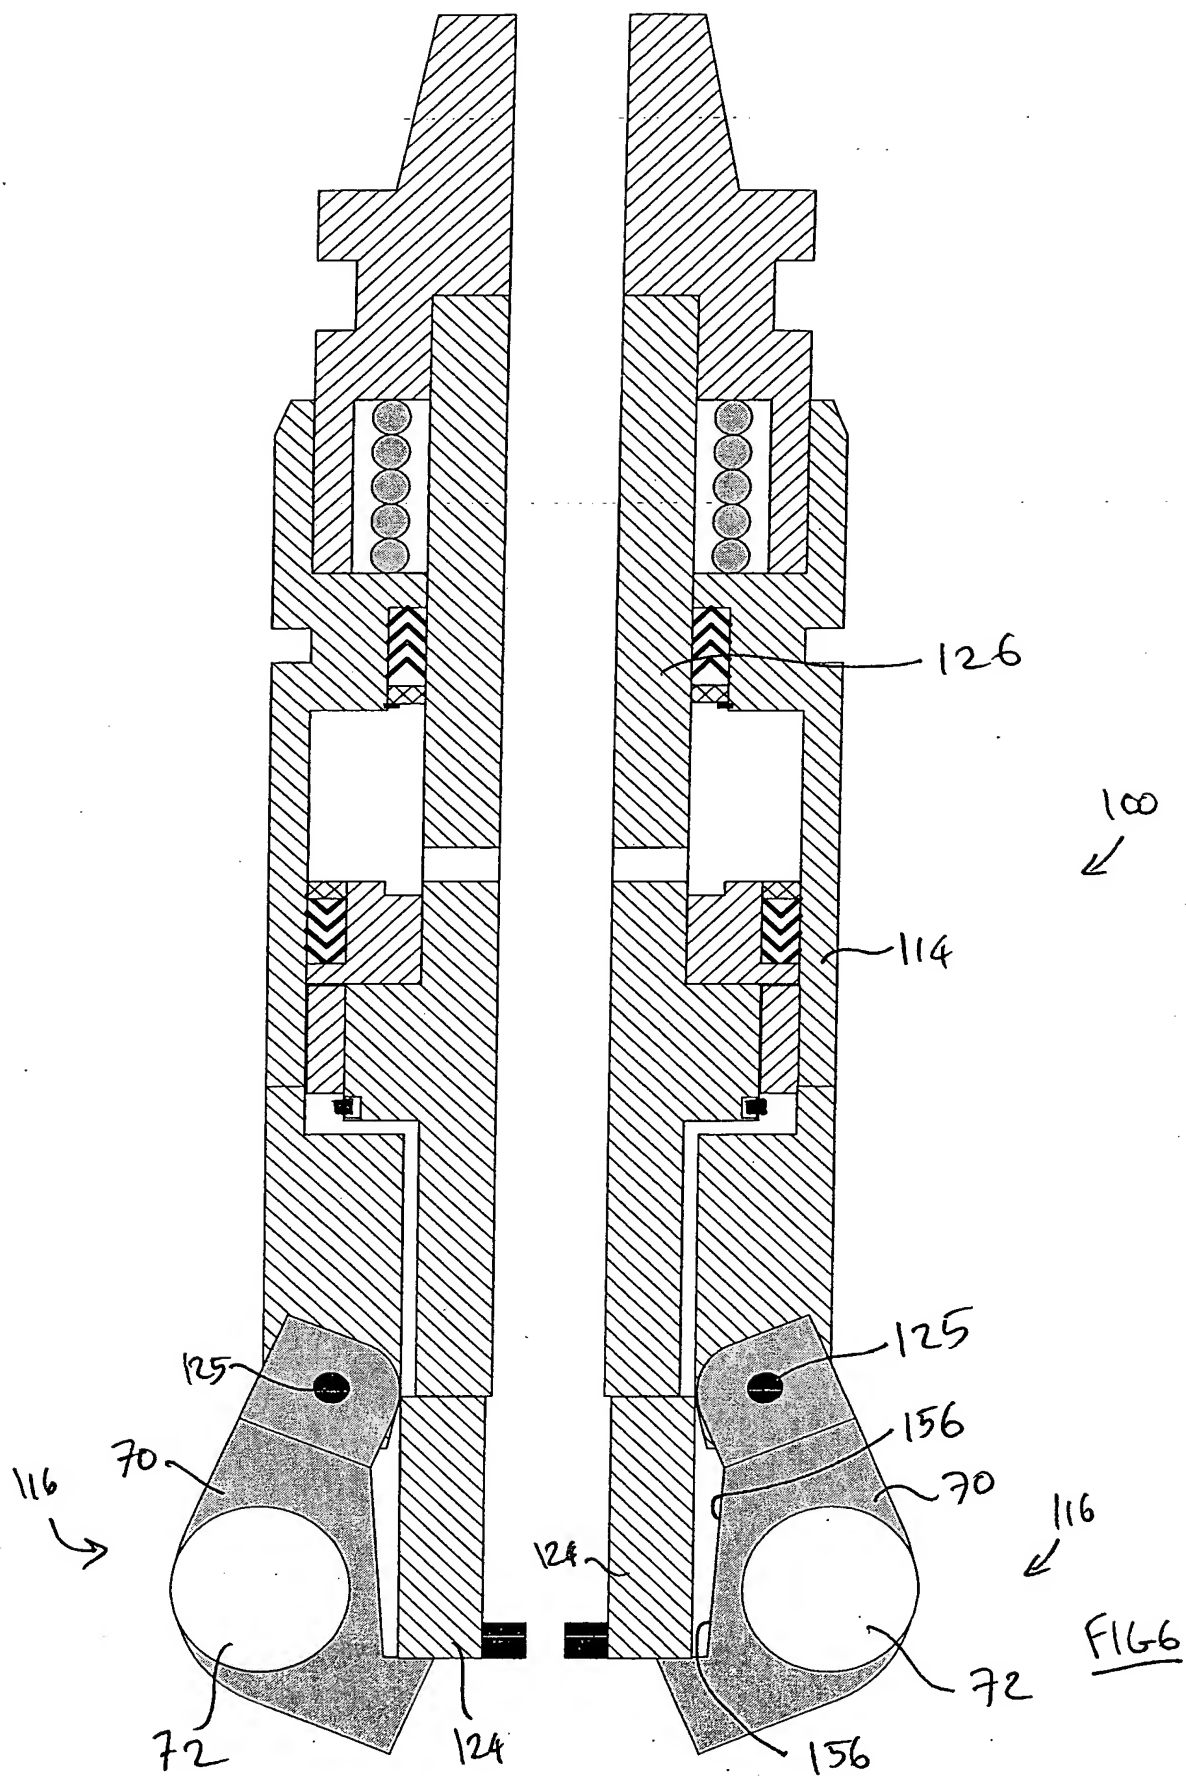



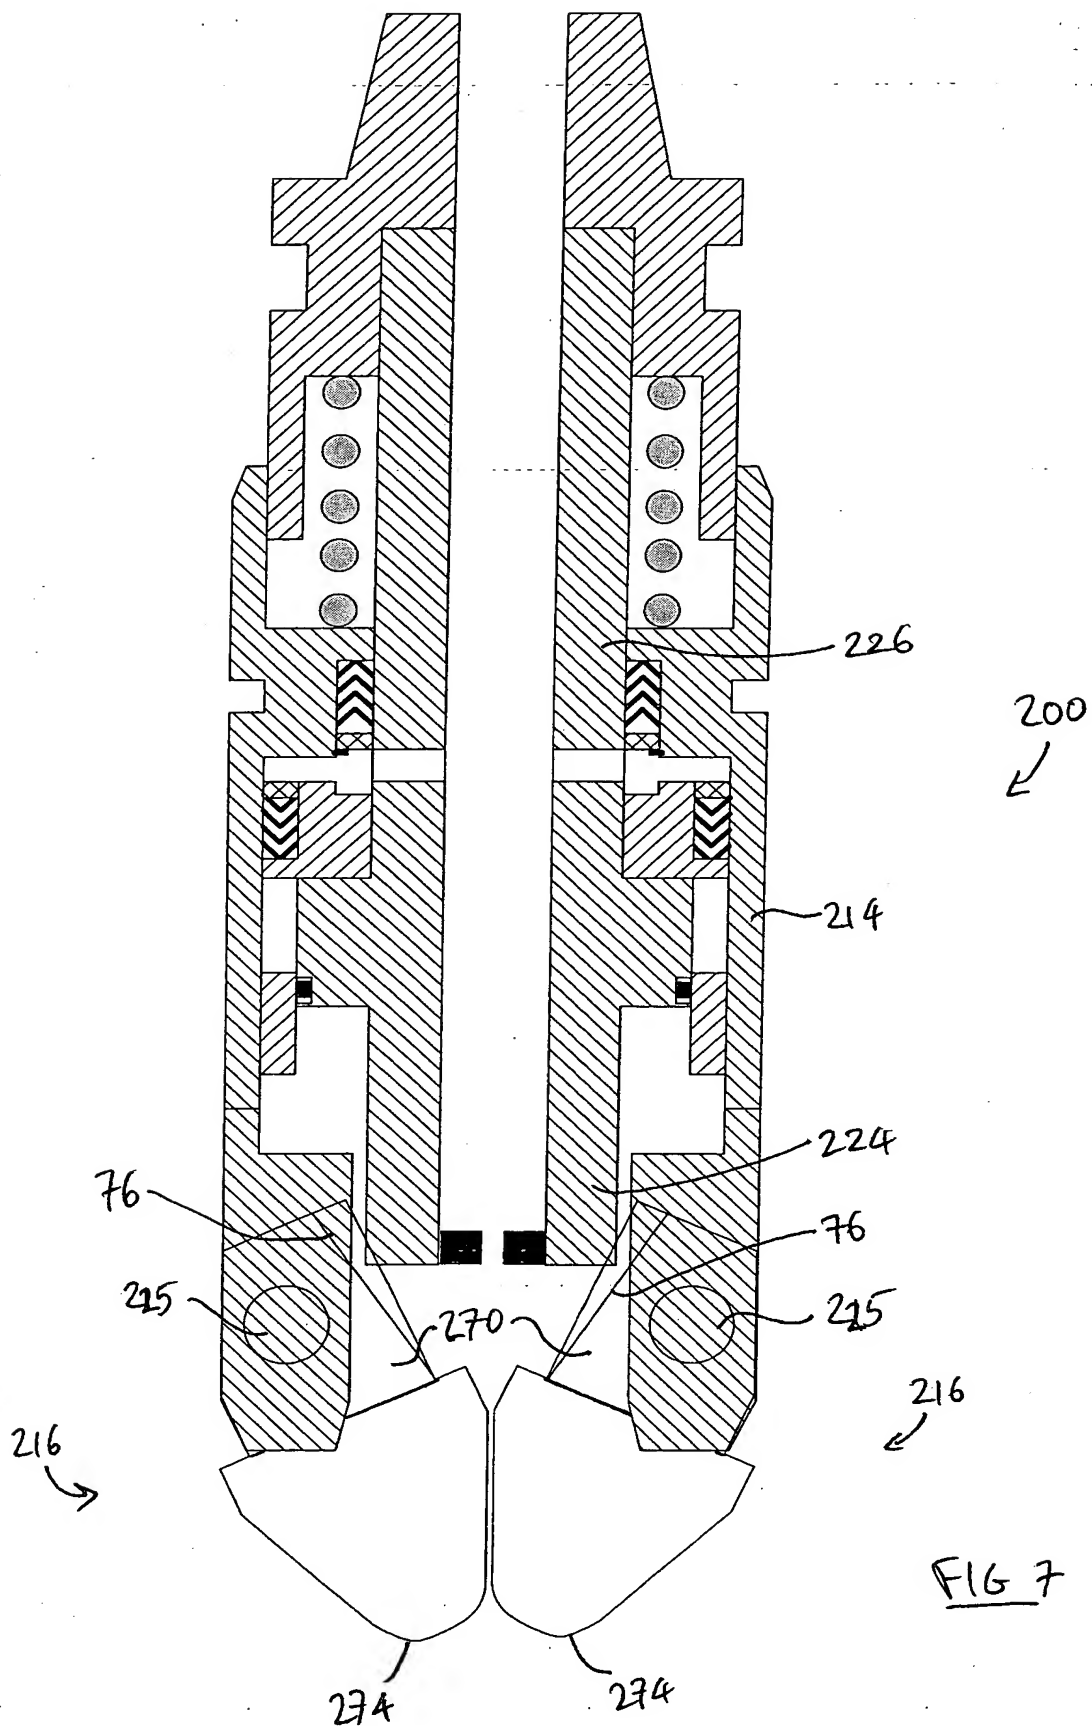





8/9

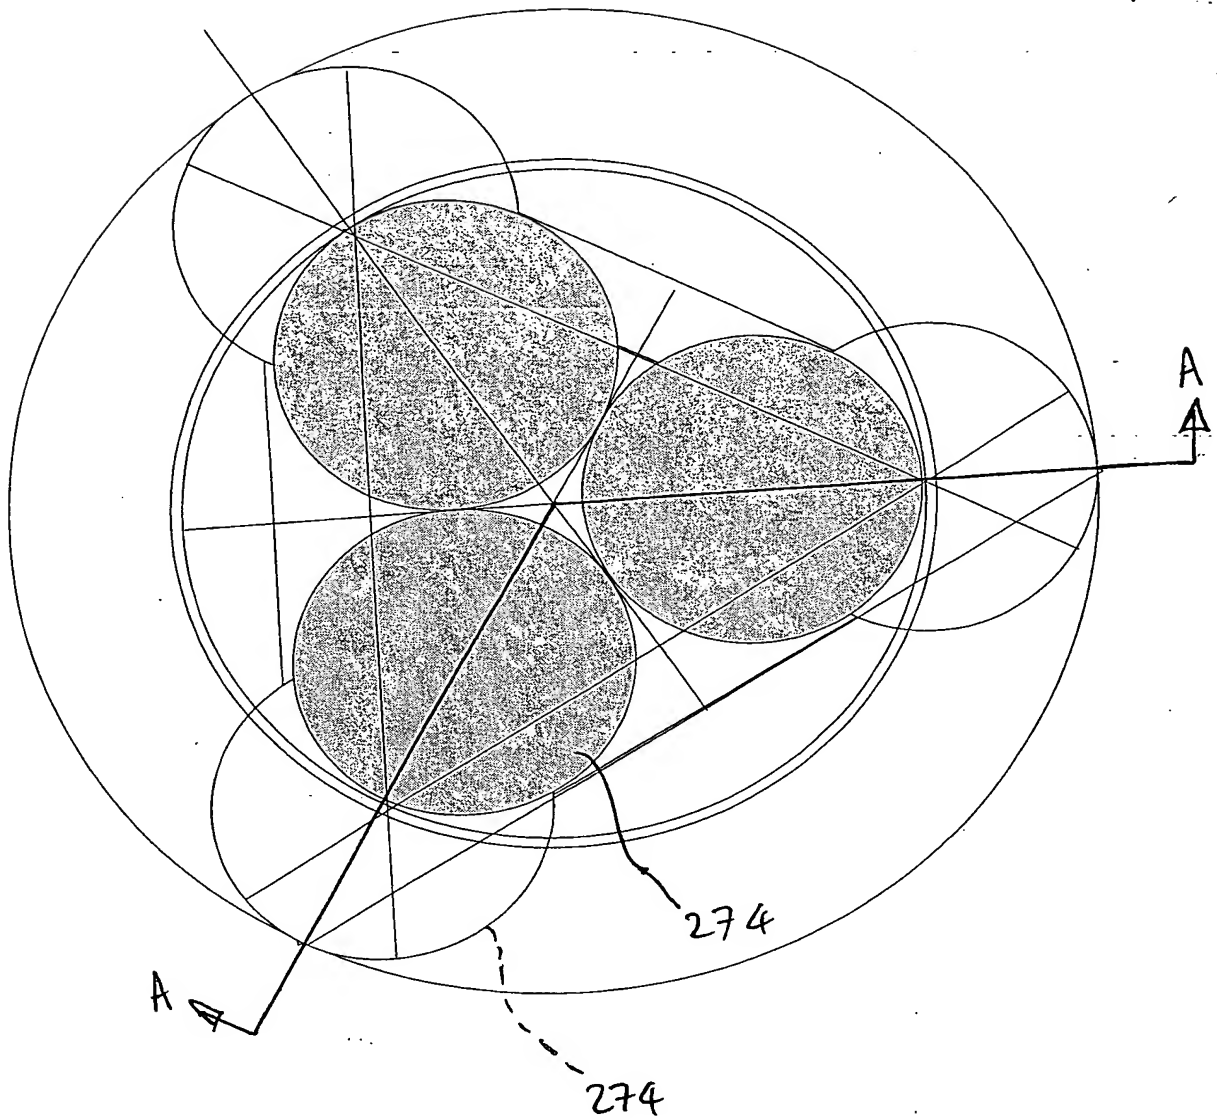


FIG 8



9/9

